


SIDE-ON VIEW OF RAIL ONLY

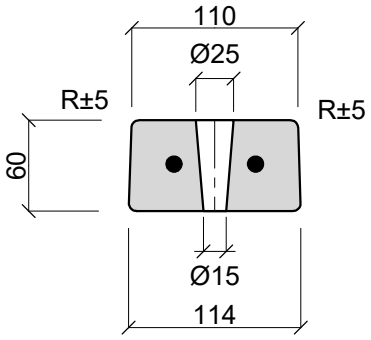


Reinforcing:
2Y10 bars h.d.g.


CROSS SECTION

RAIL

Reinforcing:
1 x Y10 bar
h.d.g.

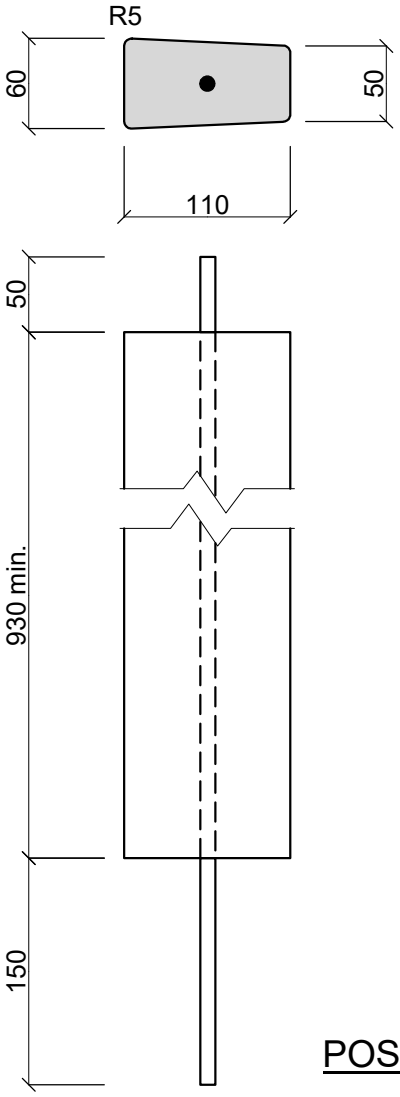

POST

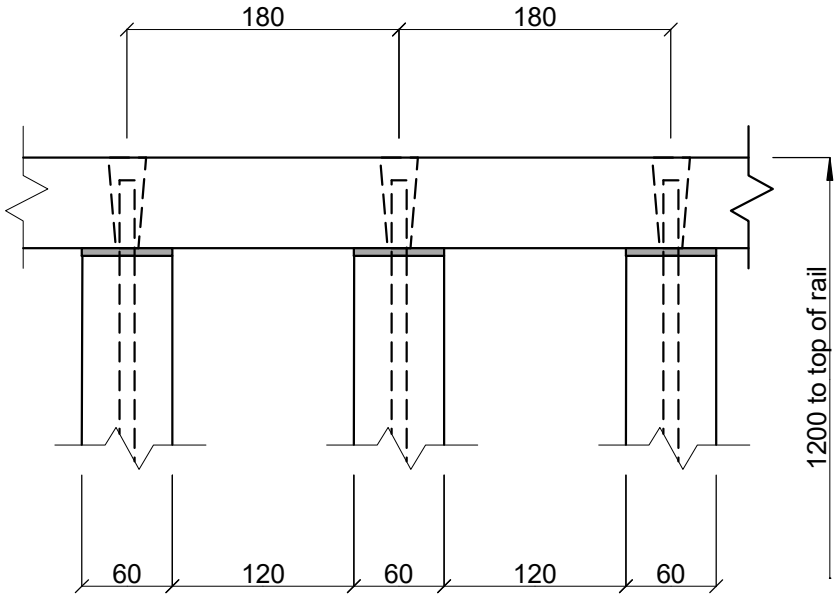

ELEVATION OF BALUSTRADE TOP

Specification:

1. Concrete 40Mpa 28 days
2. Rebar: High tensile to SANS 920
3. Hot dipped galvanising to SANS 763

PRECAST CONCRETE PEDESTRIAN PARAPET COMPONENTS
4.5kN/m DESIGN TO SANRAL DWG TD-S-P-804-V1

Vanstone