

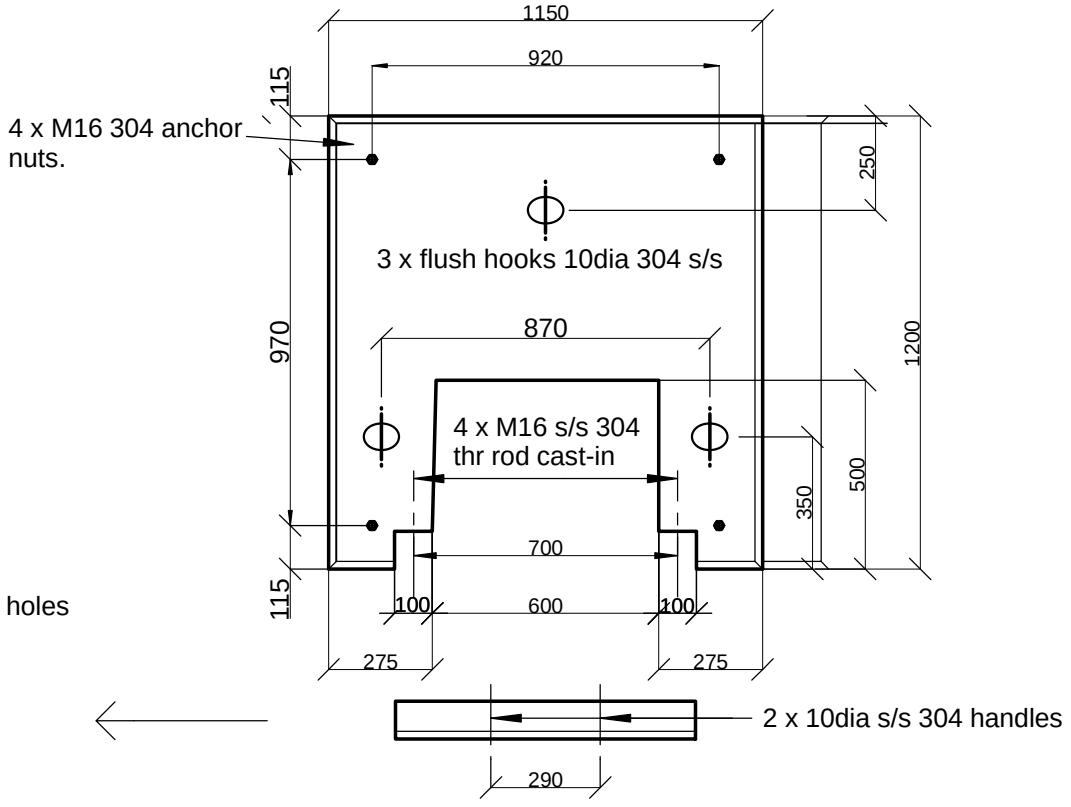


TOP VIEW

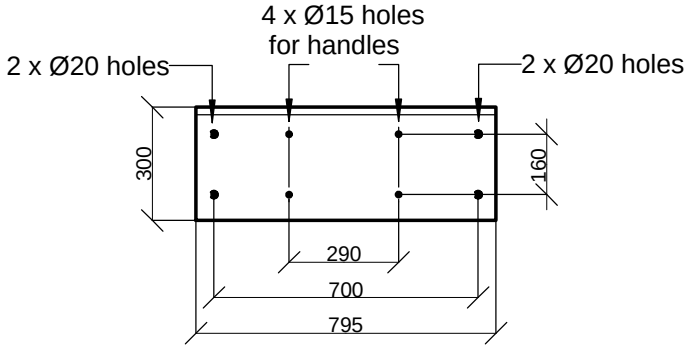

FRONT VIEW OF REMOVABLE COVER

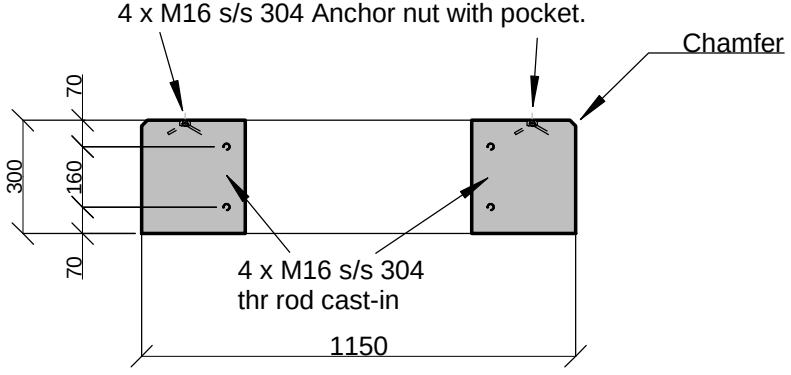

SECTION

SPECIFICATION:

1. Concrete fcu = 30MPa
2. Reinforcing steel to SANS 920
   Detailing to bending schedule.
3. All steel except reinforcing is
   stainless steel.

References:
Eskom Drawing No. D-DT-0863 Sheet 2
SAP No. 0216758
NRS 095:2012 Figure A.4
Vanstone: P8-NRS-A.4

PLINTH FOR 2-WAY RMU
1150 x 1200 x 300

Vanstone Precast (Pty) Ltd
www.vanstone.co.za
Tel 012 541 2056

Vanstone